



# Quote/Order form

Email: info@twsplastics.co.uk

Tel: 01296 331128 | 01434 267637

## Contact Details:

Ordered by: \_\_\_\_\_

Company Name: \_\_\_\_\_

Address: \_\_\_\_\_

\_\_\_\_\_

Postcode: \_\_\_\_\_

Telephone: \_\_\_\_\_

Fax: \_\_\_\_\_

Email: \_\_\_\_\_

Delivery date requested: \_\_\_\_\_

## Site Contact:

Contact Name: \_\_\_\_\_

Delivery Address: \_\_\_\_\_

\_\_\_\_\_

Postcode: \_\_\_\_\_

Telephone: \_\_\_\_\_

## Delivery Options

Fully assembled with outerframe joints sealed with silicon

Outerframe sealed but sashes separate

Kit form

## Dimensions

Overall Frame Width (mm)  
Sashes over 1000mm wide require Heavy Duty hardware at extra cost

Overall Frame Height (mm)  
Note: you must allow minimum 10mm tolerance between your frame sizes and your opening size.

Opening direction  Inward  Outward

Cill requirements included in overall frame height  150mm  No cill required  
Note: Cill height is 25mm

## Bottom Track Detail

Standard Threshold/Track

20mm Low Threshold Silver Anodised

Threshold Ramp Silver Anodised

Threshold Rebate Silver Anodised

## Standard Stock Colours

White Exterior and White Interior

Grey Exterior and Grey Interior

Grey Exterior and White Interior

Black Exterior and Interior

## Dual & Special Colours

Internal RAL \_\_\_\_\_

External RAL \_\_\_\_\_

## Trickle Vents

4000mm<sup>2</sup> trickle vents through 38mm add on to head  1  2  3  4

## Drainage Required?

Yes: With Cill:  Concealed  Face  
No Cill:  Face (no concealed option)

No:

## Master Door Handle

White  Black

Satin  Chrome

## Shootbolt Handle

White  Grey 7016  Black

Satin  Chrome

## Shootbolt Locking Option

Internal Locking No Cylinder

Internal Locking With Cylinder

Internal/External Locking With Cylinder

Total number of leaves	Number of leaves folding left	Number of leaves folding right

## Features and Benefits

- Maximum height 2500mm
- Maximum width 1200mm
- Maximum sash weight 120kg
- Adjustable jambs for easy installation and adjustment
- Ultra smooth bottom running
- Slim sightlines
- Stock colours on short reliable lead times
- Dual Colour & Special Finishes available
- Intermediate doors have concealed shoot bolt locking with single point handle. Key locking optional
- Option for access from outside on any configuration
- Every conceivable configuration achievable up to a maximum 7 Left 7 Right with bottom rolling
- Opening either in or out
- 30mm polyamide thermal break for increased thermal values
- Inline system with sash and outer frame the same depth


## Size & Weight Restrictions

	Max	Min
Overall Height:	2500mm	1900mm
Overall Width:	7000mm	1600mm
Max Panel Width:	1200mm	300mm
Weight Per Panel:	120KG	


No responsibility will be accepted unless the doors have been installed fully square and level in accordance with the code of practice for the installation of aluminium doors and windows (COP)W362/2.

## Stock Colour Options

RAL 9910	White Gloss
RAL 7016	Anthracite Grey Matt on white or both sides
RAL	Black Matt both sides
Other colours/finishes and Dual Colours on longer lead times	

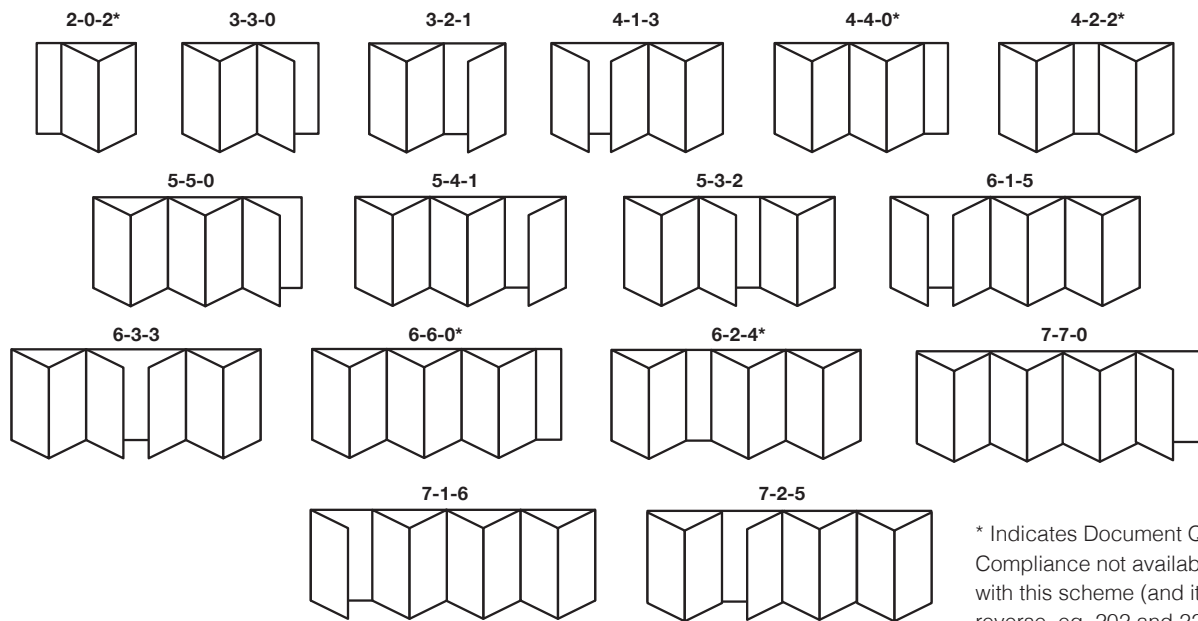

## Adjustable Jambs

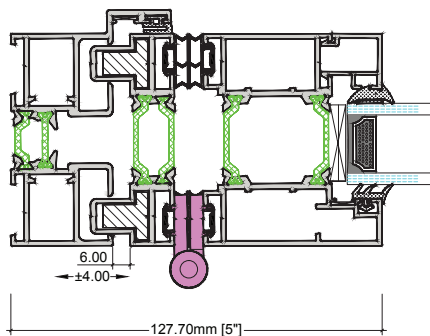

Outerframe detail with adjustable jambs

## Easy Installation

For ease of installation our new bi-fold system comes with adjustable jambs to both sides

These allow installers to correct issues that can sometimes take hours or days of repeat visits to sort out.

NB: Toe and heeling of sashes is still required.